



TECHNICAL DATA

SHEET – PINE APG



The mark of responsible forestry



1. General Description

Kiln-dried, planed pine lumber (S4S – surfaced four sides), graded as APG (Appearance Grade), suitable for applications requiring good surface quality and dimensional stability.

2. Species

Pine (commonly *Pinus radiata* or other plantation-grown species).

3. Grade Classification


Grade: APG (Appearance Grade)
Selected to minimize visible defects.
Non-structural applications.

4. Processing

Kiln-dried (KD)
Planed on four sides (S4S)
Dimensionally calibrated

5. Moisture Content

10% – 12% (export standard)

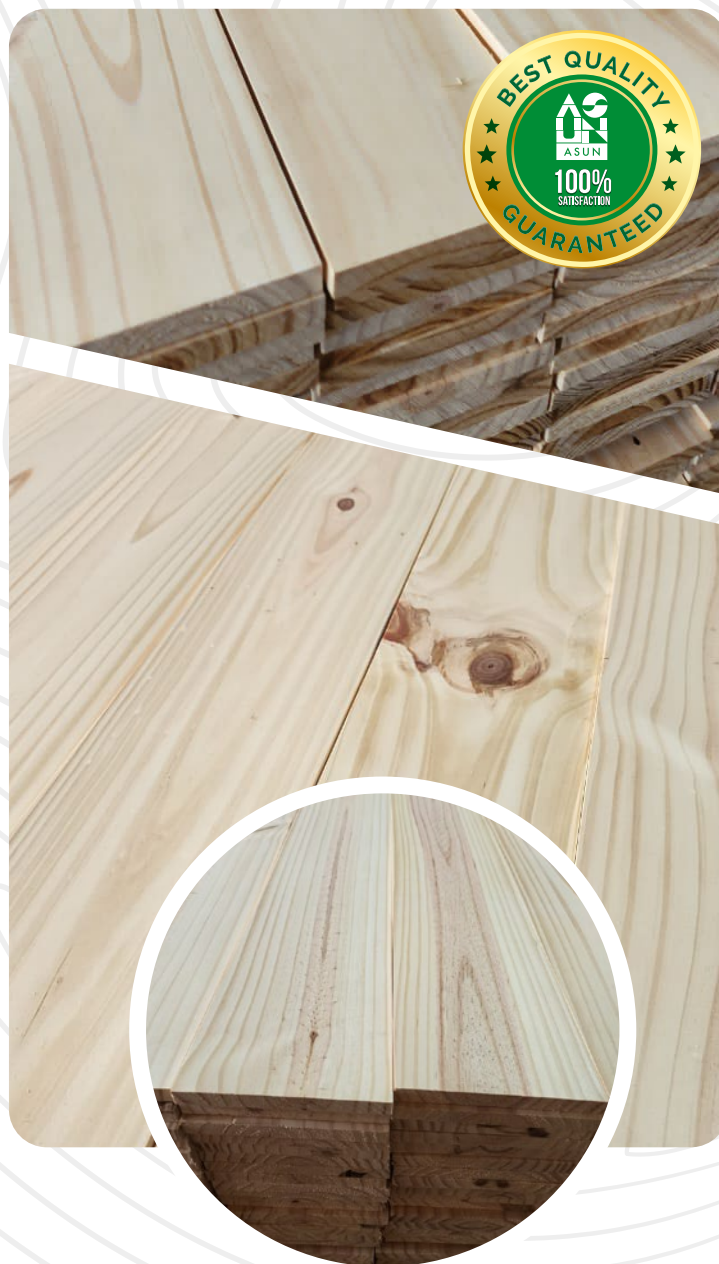

6. Physical Properties

Density: approx. 450 – 500 kg/m³
Straight grain
Fine texture
Light color

7. Product Characteristics

Good dimensional stability
Smooth surface
Easy machining
Good fastening performance

8. Dimensions

Espesor, ancho y largo según requerimiento del cliente.

9. Applications

Mouldings, furniture, packaging, interior carpentry.

10. Advantages

Excellent cost-quality ratio, high availability.



www.asun.cl

Prestigious clients in Japan, Korea, Taiwan, Thailand, China, Malaysia, Europe, the Middle East, the USA, Canada, Mexico and Central America.

ASUN Chile Ltda. Headquarters
Avenida Prat 199, Torrea A OF 1009 | Concepción - Chile - C.P. 4030000
Phone: (56) 41 - 2127780 mail: contacto@asun.cl



@aserraderos_unidos_asun

